

The shape and design of the EVORA fireplace stoves closely follow the latest interior design trends. EVORA is a great choice for a wide spectrum of customers and has become a highly popular model.

EVORA T Fireplace stoves

The EVORA T fireplace stoves provides more than one point of view of the flames. The rotating combustion chamber allows you to view your fire from multiple angles.

This fireplace stove is suitable for low-energy homes. An EAI (External Air Intake) system is included. The standard version includes an upper flue gas exhaust. Thanks to the secondary air intake, the door glass is air-washed to prevent the cumulation of soot. The combustion chamber is lined with chamotte brick tiles. The primary and secondary air intakes are regulated by a single control element.


EVORA T 01

ceramic



Prices on request at your seller
order code: **EVORA T 01**

Glaze colours

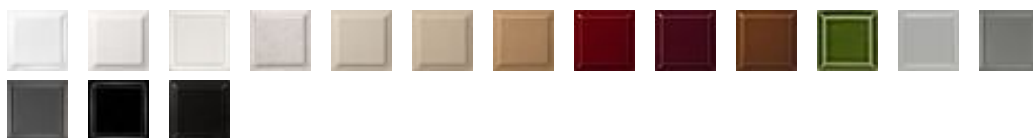

Technical parameters

Height	997 mm
Width	528 mm
Depth	398 mm
Weight	124 kg
Regulated output	2,0-6,5 kW
Smoke flue diameter	150 mm
Flue socket diameter	150 mm
External air intake diameter	125 mm
Axis height of rear outlet	863 mm
Draught	12 Pa
Efficiency	80,5 %
Average wood consumption	1,2 kg/h

A

Download

[Declaration about qualities](#)
[EC declaration of conformity](#)
[Ecodesign \(EU 2015/1185\)](#)
[Energy label and product sheet](#)
[Energy label \(EU 2015/1186\)](#)
[General instructions](#)
[Installation instructions](#)
[Technical documentation](#)
[Technical sheet](#)
[Warranty sheet](#)
[Download our catalogue!](#)