

CORNEA R/L 2S



We are sorry, but this model has been sold out and cancelled from our product range.

Additionally, fireplaces CORNEA A have accumulation heat exchanger, keeping heat energy for its subsequent radiation, thus increasing overall heat efficiency of the unit. The combustion chamber is clad with fireclay fittings. Standard model is without grate, but it can be easily modified to a model with the grate. Standard flue gas outlet is on the top or in the back. Secondary air supply onto the inner side of the door is an efficient solution to avoid dirt deposits, hence, you will not be distracted from viewing into the flames. Primary and secondary air intake control is made using one control element. Sufficient air for an optimum combustion process will be provided by the EAI system (external air intake from the exterior). Besides, the stove can be fitted with one or several nice firewood storage boxes.


order code: **COR R 2S**

with accumulation exchanger - order code: **COR R 2S A**

order code: **COR L 2S**

with accumulation exchanger - order code: **COR L 2S A**

Glaze colours

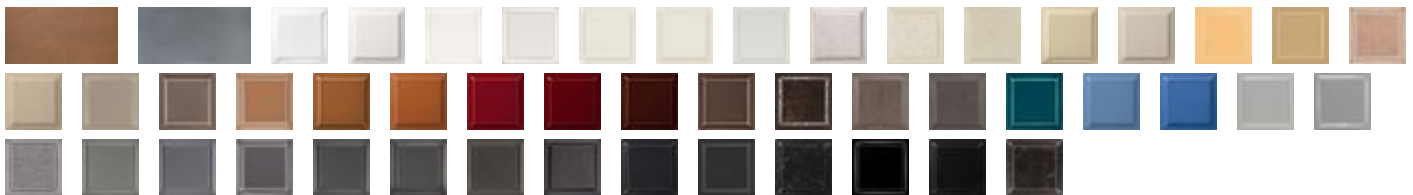

Technical parameters

Height	1694 mm
Width	460 mm
Depth	460 mm
Weight	181 kg
Regulated output	2,9-7,4 kW
Smoke flue diameter	150 mm
Flue socket diameter	150 mm
External air intake diameter	125 mm
Axis height of rear outlet	1419 mm
Draught	12 Pa
Efficiency	81,4 %
Average wood consumption	1,5 kg/h
A+	

Accessories

FIREWOOD STORAGE BOX WITH CERAMIC CLADDING (DREV 01)

Download

[Declaration about qualities](#)
[EC declaration of conformity](#)
[Ecodesign \(EU 2015/1185\)](#)
[Energy label and product sheet](#)
[Energy label \(EU 2015/1186\)](#)
[General instructions](#)
[Installation instructions](#)
[Technical documentation](#)
[Technical sheet](#)
[Warranty sheet](#)
[Download our catalogue!](#)